



THE ULTIMATE CURVED STAIRLIFT BY PLATINUM


CARRIAGE

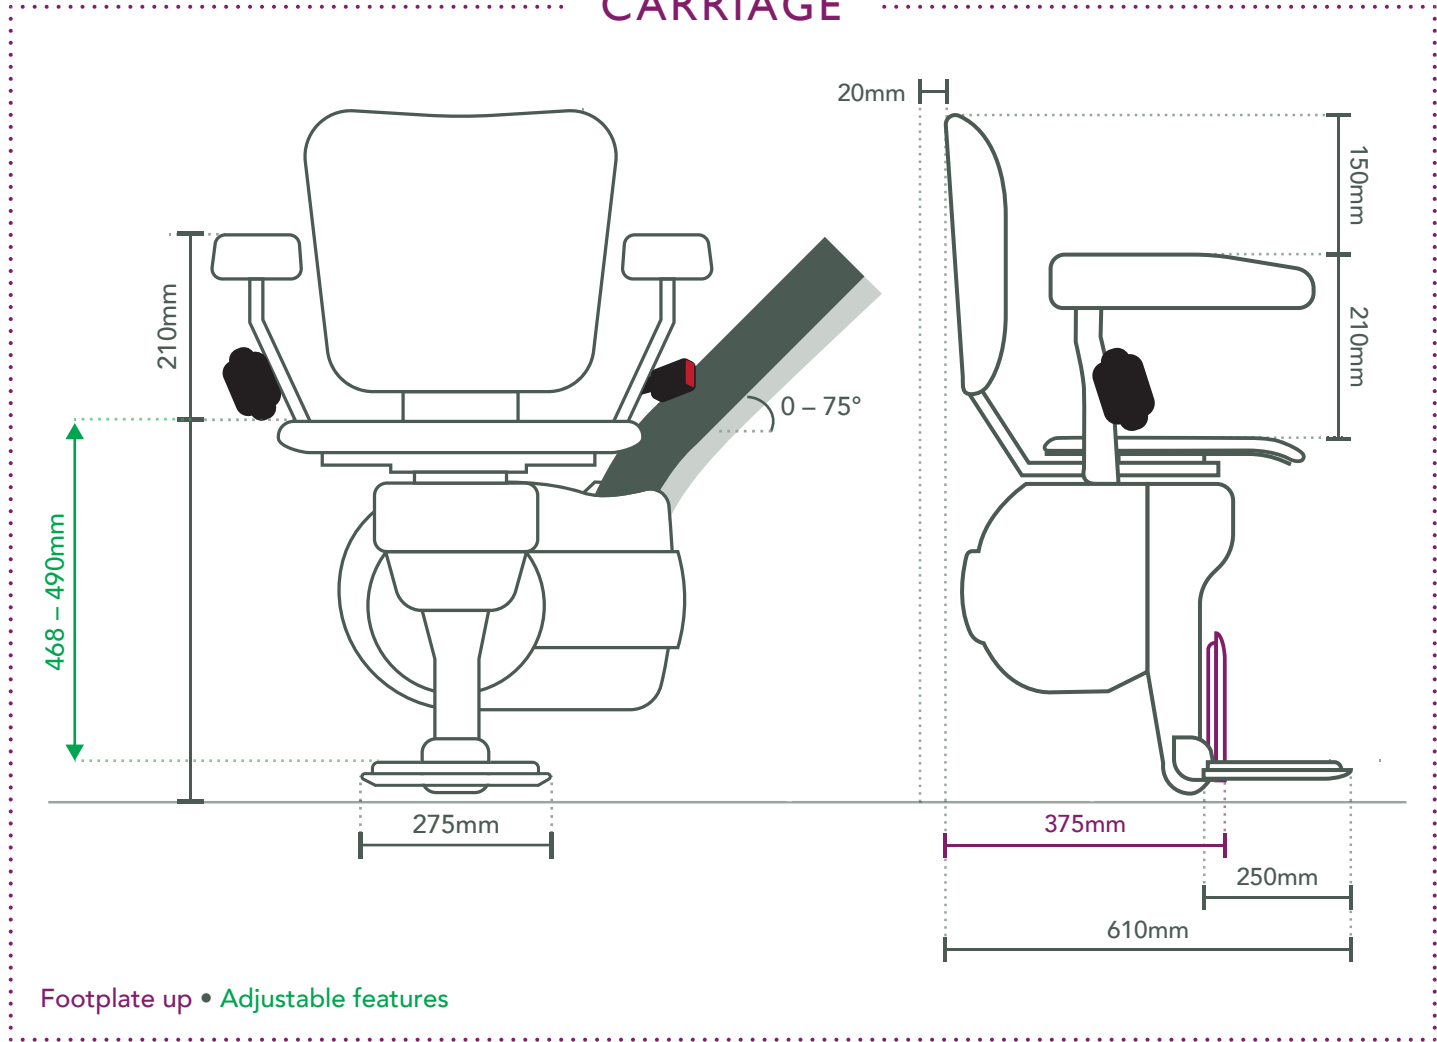


FULL BENDS

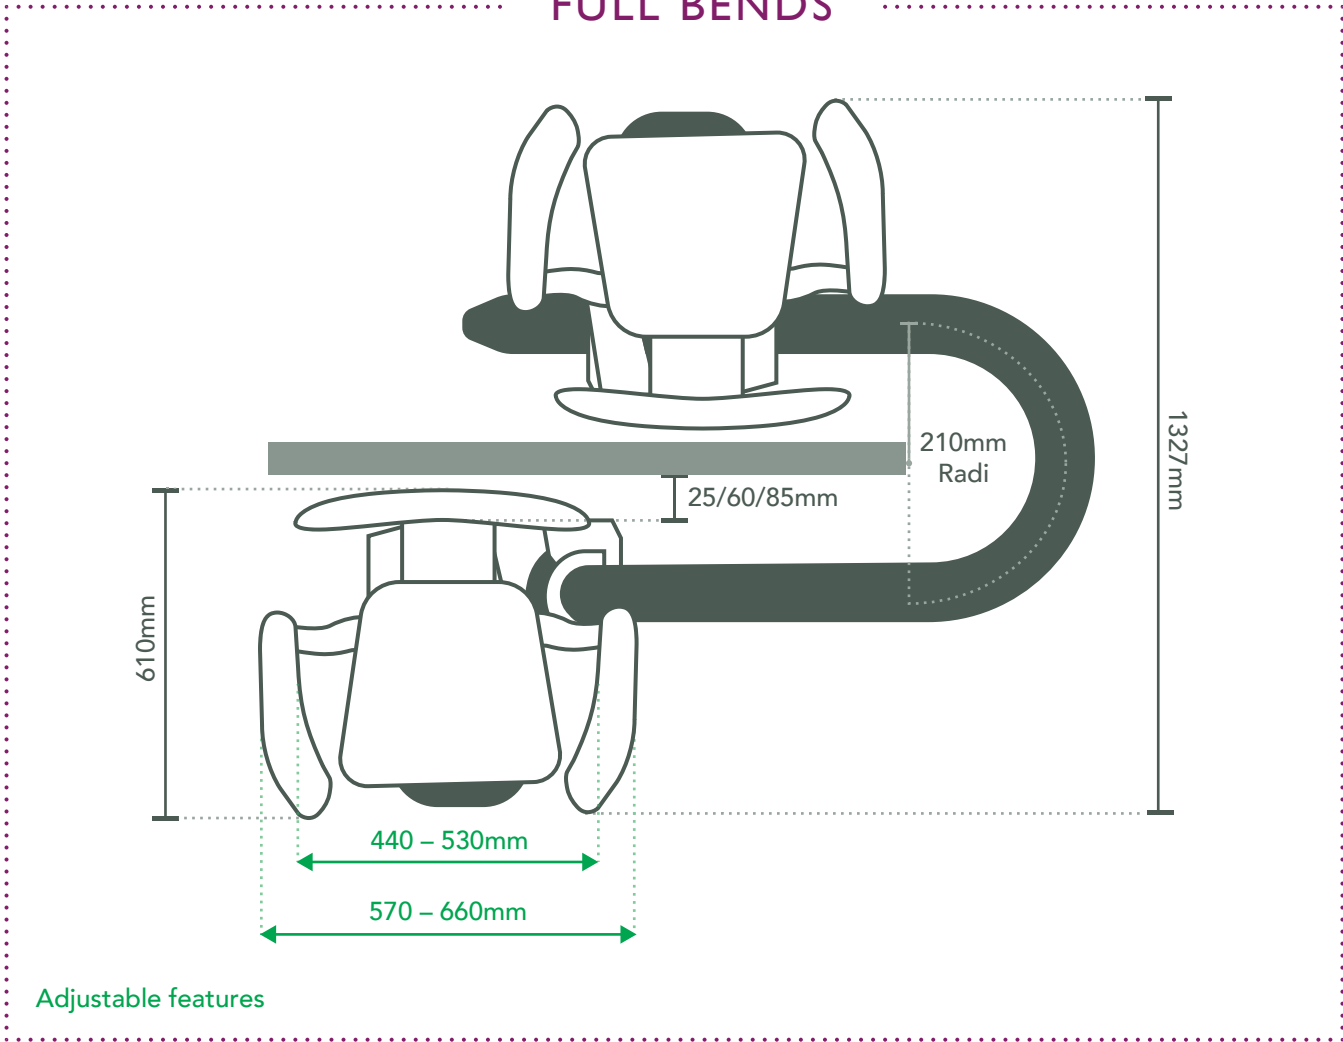

STANDARD FINISH

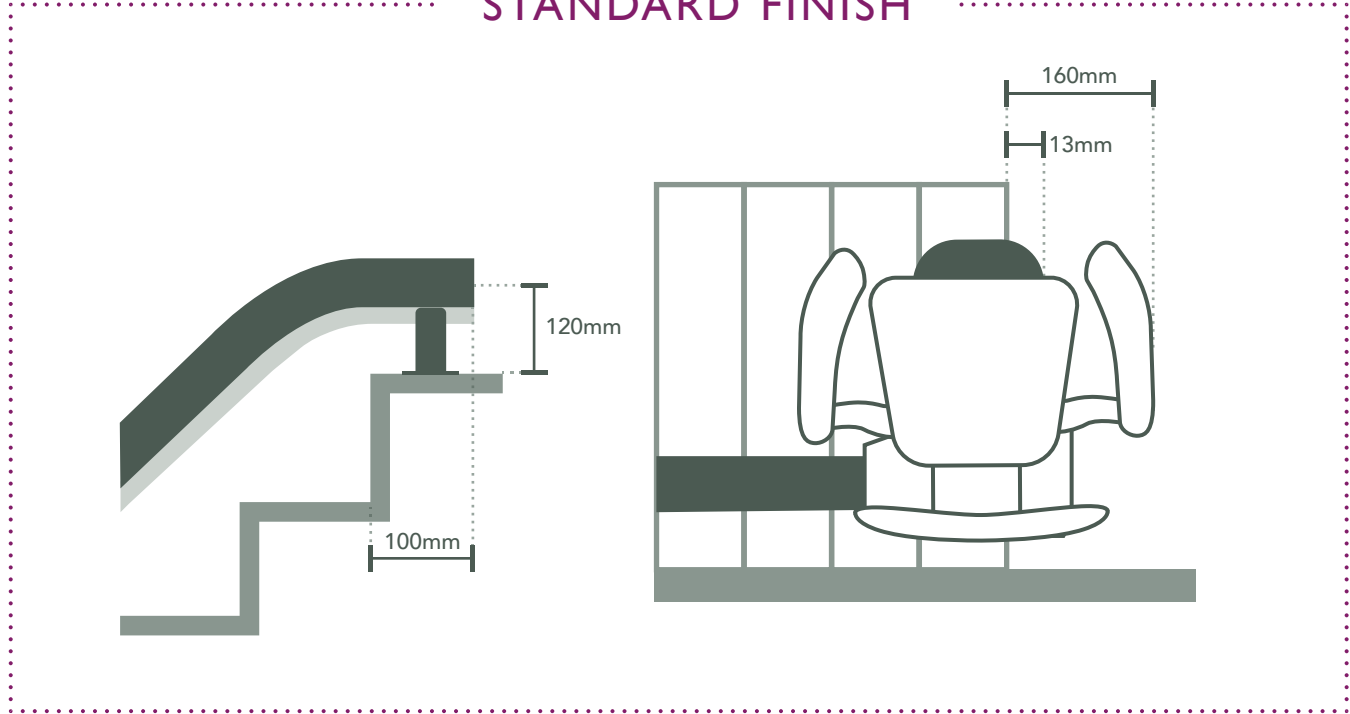


FLUSH FINISH

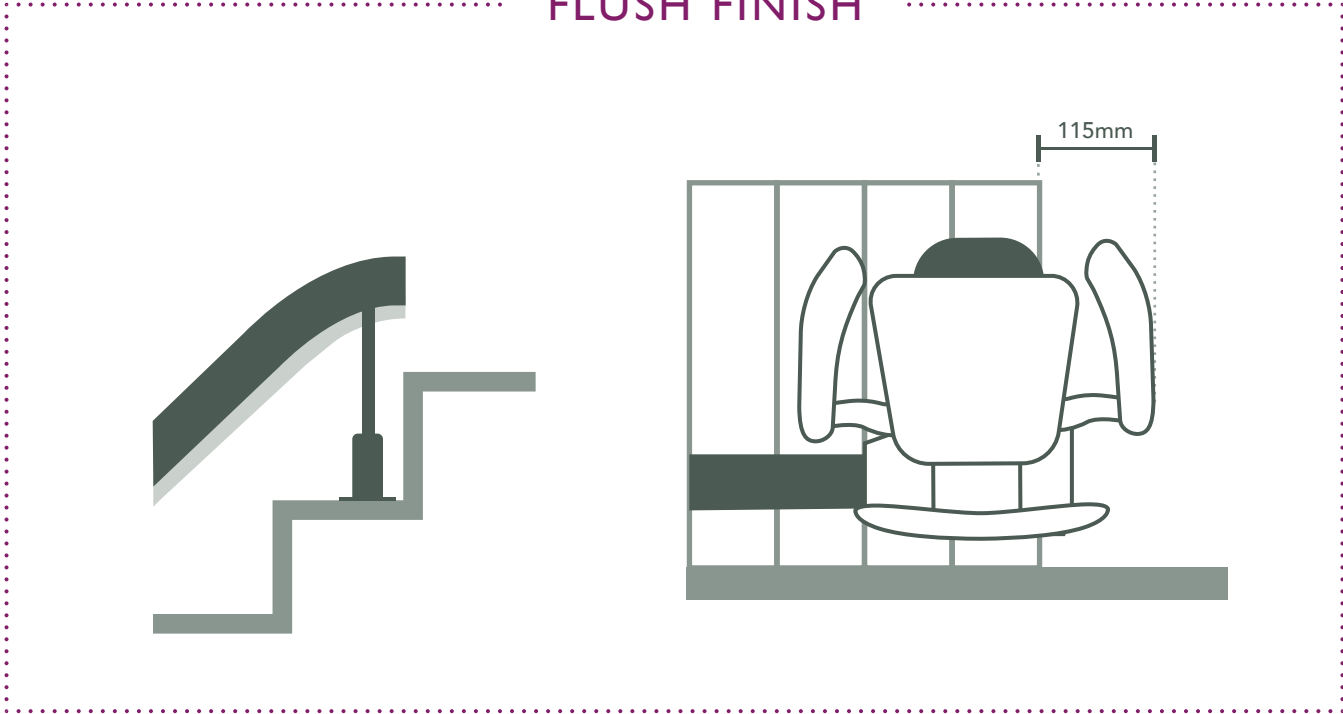


THE ULTIMATE CURVED STAIRLIFT BY PLATINUM

FIRST STEP SMART START

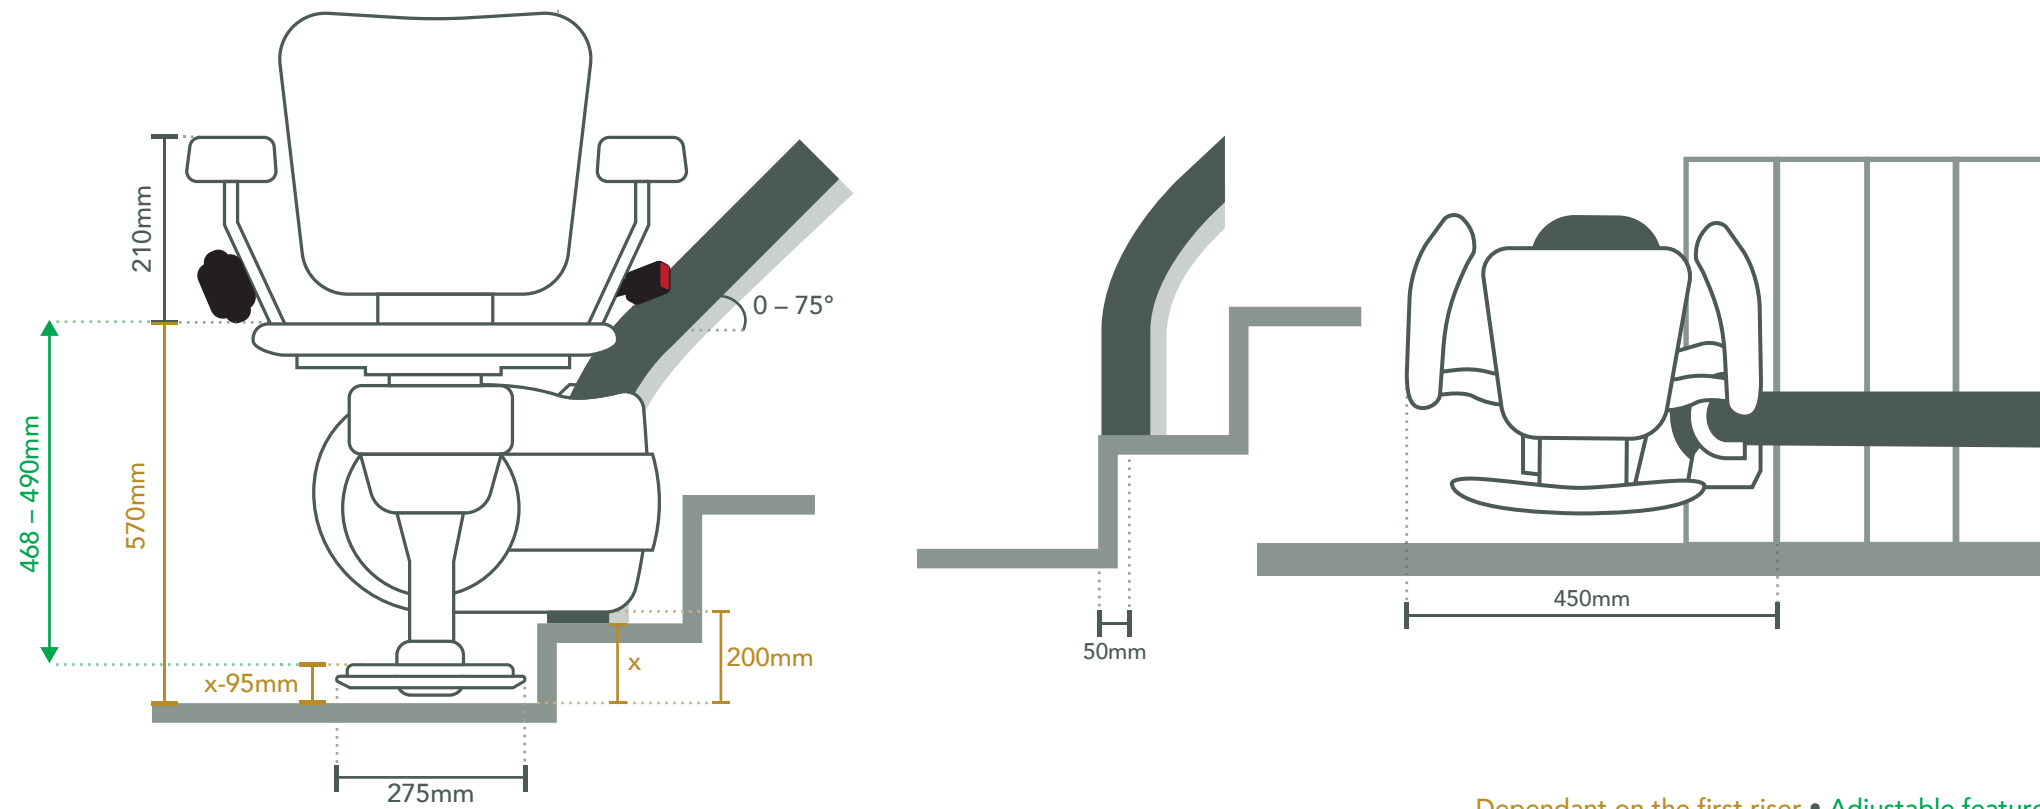

STANDARD START

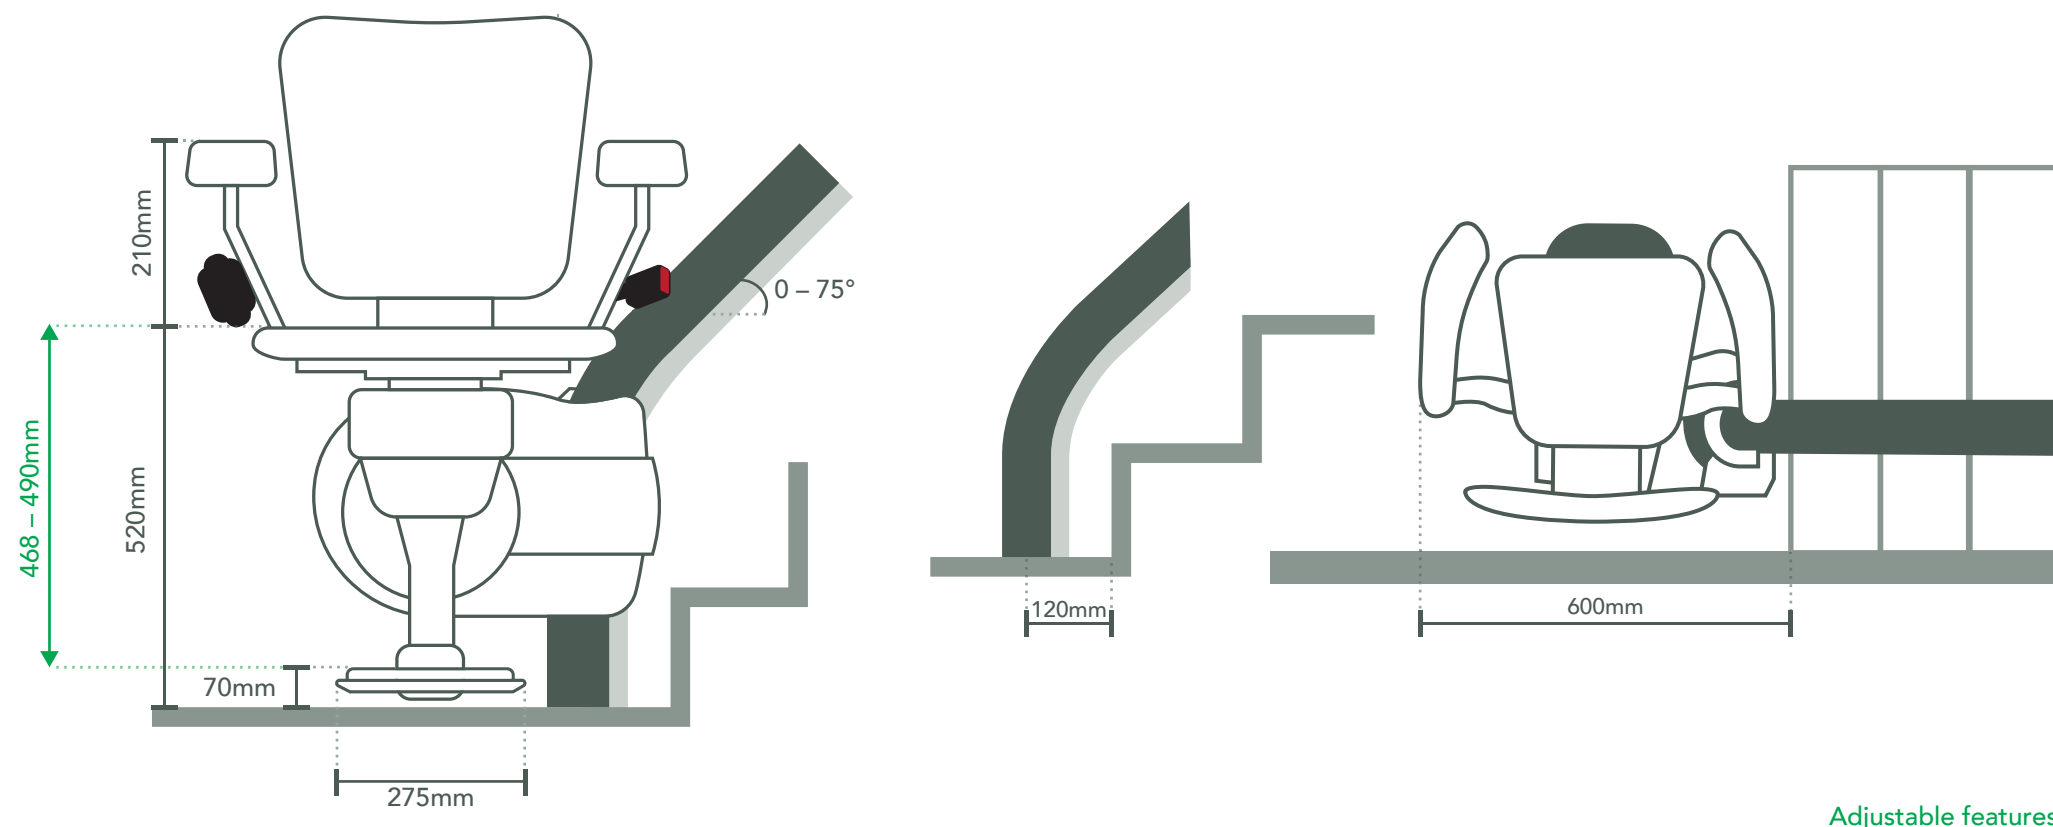

Floor to bottom of footrest (on a horizontal run on)	20mm
Top of footrest to top of seat	490 – 468mm
Top of seat to top of arms	210mm
Top of arms to top of seat back	150mm
Overall height	980mm on FSS
Length of footrest	250mm
Front of footrest to back of chair	610mm
Width between armrests	440 – 530mm
Overall width	570mm
Width of footrest	275mm
Wall to front of folded footrest	375mm
Climbing Angle	0 – 75°
Front of drop nose to first step (Smart Start)	10mm
Seat to floor (on Standard Start/Smart Start)	580mm
180 Bend on rail centre to centre maximal (0°)	420mm
180 Bend on rail centre to centre typical (40°)	420mm
180 Bend on rail centre to centre minimal (65°)	420mm
Minimum swivel radius from wall	610mm
Internal bend radius on centre line	210mm
Seat to floor (on a horizontal run on)	560mm
Top of the footrest to floor (on a horizontal run on)	70mm
Top of the tube to floor (on a horizontal run on)	160mm
Back of chair (inside) to wall	20mm
Front of tube to wall	Typically 200mm
Top of footrest to floor (on normal start/dropstart)	70mm
Diameter of the tube	80mm